

## 1565N

Elbow three piece nickel plated



The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.

### TECHNICAL SPECIFICATIONS

Maximum temperature: 110 °C

Minimum temperature: - 20°C (provided that the fluid remains in the liquid phase)

Maximum operating pressure: 30 bar

Threads: male UNI ISO 228

female UNI ISO 228


### CONSTRUCTION SPECIFICATIONS

Body : EN12165 brass

Nut : : EN12165 brass

Tail : : EN12165 brass

O-ring : Nitrile rubber NBR

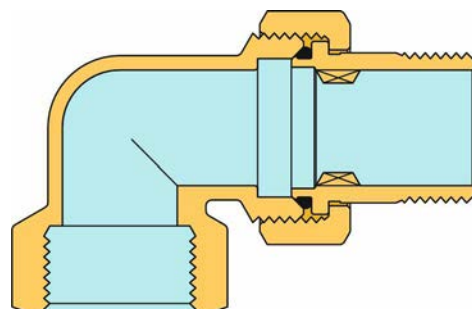

### PRODUCTION RANGE

| Art.  | Code    |             | Finishing     |
|-------|---------|-------------|---------------|
| 1565N | 1500510 | 3/8"X3/8"   | Nickel-plated |
|       | 1500168 | 1/2"X1/2"   |               |
|       | 1500244 | 3/4"X3/4"   |               |
|       | 1500250 | 1"X1"       |               |
|       | 1500430 | 1"1/4X1"1/4 |               |
|       | 1500450 | 1"1/2X1"1/2 |               |
|       | 1500543 | 2"X2"       |               |

### CERTIFICATIONS

